

## ADSL + ISDN Combo Modem

*Securely share your high speed ADSL connection*



▲ BIPAC-7025

- High-speed Internet Access with Full-rate ADSL and ISDN
- Multi-protocol to establish a connection with ISP
- G3 fax via ISDN with optional bundled software
- User-friendly Installation utility
- Plug-and-Play for Windows
- Windows 98/98SE/Me/2000/XP
- Compliant with Annex B/U-R2 ADSL and Euro-ISDN □□ Standards
- Ideal for residential users

The BIPAC-7025 connects the PC to high-speed ADSL Internet access and at the same time provides all ISDN voice/data services. It complies with ADSL full rate standards and supports downstream/upstream rates up to 8Mbps/1Mbps. With its user-friendly installation utility and Windows plug-and-play feature, it can be easily installed in a desktop PC. With BIPAC-7025, users do not need to install an Ethernet NIC card, which is required by normal external ADSL Ethernet modems. The users can enjoy broadband multimedia applications, such as interactive gaming, video streaming and real-time audio, as well as versatile ISDN services much easier and faster than ever before.

## Feature & Specification

### ADSL

- Support Full-rate Annex B and U-R2 standard
- Downstream data rate up to 8Mbps, upstream up to 1Mbps
- Support OAM F4/F5 loopback
- Support multiple data encapsulation format, including PPPoE, PPPoA, IPoA, and RFC1483 bridged or routed
- Supports NDIS interface for RAS and Dial-Up Networking
- Easy GUI program for configuration and management


### Hardware Specification

#### Physical Interface

- WAN: ADSL and ISN ports

#### Physical Specification

- Dimensions: 65"x4.72"x0.83" (165mmx120mmx21mm)

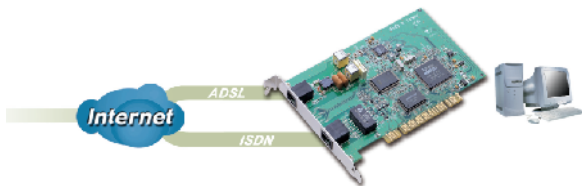

### ISDN

- Compliant with Euro-ISDN (TBR3) standard
- Internet access up to 128Kbps with Multilink PPP
- Support both CAPI 2.0 and NDIS WAN miniport drivers
- Support G3 fax, answering machine and file transfer via ISDN with bundled software (optional)
- Easy GUI program for configuration and management

### OS Support

- Windows 98/98SE/Me/2000/XP

### Operating Environment

- Operating temperature: 0 ~ 45 °C
- Storage temperature: -20 ~ 70 °C
- Humidity: 20 ~ 95% non-condensing

Specifications are subject to change without notice.

#### Billion Electric Co., Ltd.

8F, No.192, Sec.2, Chung Hsing Road,  
Hsin Tien City, Taipei Hsien, Taiwan

TEL : +886-2-2914-5665

FAX : +866-2-2918-6731,+886-2-2918-2895

E-mail : sales@billion.com