



▲ BiPAC 7404VNOX



▲ BiPAC 7404VNPX

3G / VoIP / 802.11n ADSL2+ (VPN) Firewall Router Series with PSTN Fixed-line support								
Product Model	USB port for 3G backup	Auto Fail-over	LAN	Console	FXS Port	FXO Port	IPSec VPN	Wi-Fi Protected Setup (WPS)
BiPAC 7404VNOX	✓	✓	Gigabit 4-port	PS2	2	1	16 VPN tunnels	✓
BiPAC 7404VNPX	✓	✓	Gigabit 4-port	PS2	2	1	VPN pass-through	✓

BiPAC 7404VNX series

3G / VoIP / 802.11n ADSL2+ (VPN) Firewall Router Series with PSTN Fixed-line support

Imagine how a networking router can deliver the ultimate benefits to SOHO and office users – economical phone calls over Internet, mobility, wireless speed and coverage with no more dead zones, and always on connectivity - Communication just got cheaper!

The BiPAC 7404VNX series, featuring Dual-WAN 3G / ADSL2+ for auto fail-over, VoIP functionalities, the latest 802.11n Wireless Access Point and 4-port Gigabit switch, is a brilliant design for all-in-one need. What's amazing is it features a USB 2.0 port for plugging in a 3G / HSDPA modem, which works as a backup WAN, functioning as an automatic fail-over when an ADSL2+ connection breaks down. The Gateway feature called "Least Cost Routing" enables users to choose the most economical rate of VoIP calls provided by different Internet Telephony Service Providers (ITSP). This router series integrates an FXS port allowing you to make phone calls over Internet simply by connecting the device to your existing telephone set. The additional FXO port enables phone calls making through PSTN Fixed-line while sharing a high-speed Internet connection. Its built-in 4-port Gigabit Switch enables amazingly fast LAN transmissions for bandwidth-consuming applications such as video streaming and file sharing. With the BiPAC 7404VNX series, you can experience the ultimate wireless technology while making low cost landline calls wherever a 3G connection is available - in a meeting or at a trade show.

Truly Cost Saving

Making VoIP calls with toll-quality is extremely simple; just connect the router to your existing telephone sets. The BiPAC 7404VNX series complies with the most popularly adopted VoIP industrial standard, SIP protocol, to ensure the interoperability with SIP devices and major VoIP Gateways. The Gateway feature called "Least Cost Routing" offers the choice of the most economical rate provided by different ITSP. One RJ-11 FXO port is integrated to transmit inbound and outbound calls through PSTN Fixed-line, so that users may still be able to receive phone calls through PSTN, while enjoying VoIP service at the same time. In addition, outgoing calls will be automatically redirected to PSTN when the Internet or VoIP service is not available. The router also supports a wider range of telephony features, such as call waiting, silence suppression, line echo cancellation, caller ID, etc.

3G Mobility and Always-On Connection

With the BiPAC 7404VNX series you can connect a 3G / HSDPA USB modem to its built-in USB port, enabling you to use a 3G / HSDPA, UMTS, EDGE, GPRS, or GSM Internet connection, which makes downstream rates of up to 14.4Mbps*3 possible. With the increasing popularity of the 3G standard, communication via the BiPAC 7404VNX series is becoming more convenient and widely available - allowing you to watch movies, download music on the road, or access e-mail no matter where you may be. You can even share your Internet connection with others, no matter if you're in a meeting or speeding across the country on a train. The auto fail-over feature ensures maximum connectivity and minimum interruption by quickly and smoothly connecting to a 3G network in the event that your ADSL line fails. The BiPAC 7404VNX series will then automatically reconnect to the ADSL connection when it's restored, reducing connection costs. These features are perfect for office situations where constant and uninterrupted connection is paramount and of utmost importance.

Optimal Wireless Speeds and Coverage


With an integrated 802.11n Wireless Access Point, the router delivers up to 6 times speeds and 3 times wireless coverage of an 802.11b / g network device. It supports a data rate of up to 300Mbps and is also compatible with 802.11b / g equipment. The Wireless Protected Access (WPA-PSK / WPA2-PSK) and Wired Equivalent Privacy (WEP) features enhance the level of transmission security and access control over Wireless LAN. The router also supports the Wi-Fi Protected Setup (WPS) standard, allowing users to establish a secure wireless network by simply pushing a button. If your network requires wider coverage, the built-in Wireless Distribution System (WDS) repeater function allows you to expand your wireless network without the need for any external wires or cables.

Secure VPN Connections

The BiPAC 7404VNOX supports embedded IPSec VPN (Virtual Private Network) protocols, allowing users to establish encrypted private connections of up to 16 simultaneous tunnels over the Internet. With a built-in DES / 3DES VPN accelerator, the router enhances IPSec VPN performance significantly - so you can access your corporate intranet and transmit sensitive data between branch offices and remote sites anytime; even when you are on the road, thus enhancing productivity greatly.



▲ BiPAC 7404VNOX Rear Panel




▲ BiPAC 7404VNPX Rear Panel

- Dual WAN interfaces for ADSL2+ and 3G connections
- High speed Internet access with ADSL2 / 2+; backward compatible with ADSL
- 802.11n Wireless AP
- Supports Wi-Fi Protected Setup (WPS) and WPA-PSK / WPA2-PSK
- High-speed wireless connection up to 300Mbps data rate
- Expanded wireless coverage of up to 3 times the range of 802.11b / g products
- Auto fail-over feature to ensure an always-on connection
- USB 2.0 port for plugging a 3G / HSDPA modem as backup (available separately)
- Make phone calls via the Internet as well as PSTN Fixed-line
- Voice over IP compliant with SIP standard
- Two FXS ports for connecting to regular telephones
- One FXO port for voice calls via PSTN Fixed-line
- Gateway - Least Cost Routing support (for retail package only)
- 4-port Gigabit Switch
- 16 IPSec VPN tunnels support (BiPAC 7404VNOX only)
- SOHO firewall security with DoS prevention and SPI
- Quality of Service Control
- Supports IPTV Applications*4

Ideal for:

- SOHO users
- Office users
- Event or meeting organizers



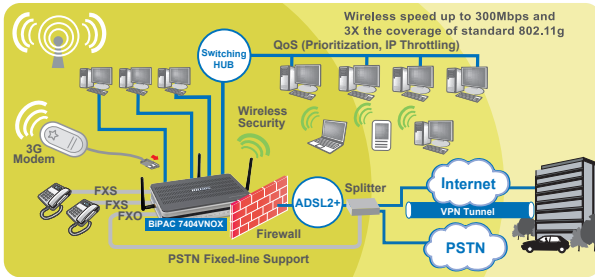

Compatible 3G USB modems*3

Brand	Model
Huawei	E169, E220, E270, E172, E272, E169G, E160G, E170
Sierra	Aircard 880U, Aircard 875U, Aircard 885U
ZTE	MF622, MF638, MF628
NOVATEL	MC950D
BandRich	Bandluxe C100
Alcatel	OT-X020
C-Motech	D50
Telstra	USB3-8521

This list is continuously updated at <http://www.billion.com/compatible-3G.html>

Features & Specifications

ADSL Compliance

- **Compliant with ADSL Standard**
 - Full-rate ANSI T1.413 Issue 2
 - G.dmt (ITU G.992.1)
 - G.lite (ITU G.992.2)
 - G.hs (ITU G.994.1)
 - ADSL over ISDN / U-R2
- **Compliant with ADSL2 Standard**
 - G.dmt.bis (ITU G.992.3)
 - ADSL2 Annex M (ITU G.992.3 Annex M) (BiPAC 7404VNOXA / VNPXA only)
- **Compliant with ADSL2+ Standard**
 - G.dmt.bis plus (ITU G.992.5)
 - ADSL2+ Annex M (ITU G.992.5 Annex M) (BiPAC 7404VNOXA / VNPXA only)

Network Protocols and Features

- NAT, static routing and RIP-1 / 2
- Universal Plug and Play (UPnP) Compliant
- Dynamic Domain Name System (DDNS)
- Virtual Server and DMZ
- SNTP, DNS relay and IGMP Proxy
- IGMP snooping for video service

Firewall

- Built-in NAT firewall
- Stateful Packet Inspection (SPI)
- DoS attack prevention including IP Spoofing, Land Attack, Smurf Attack, Ping of Death, TCP SYN Flooding, etc.
- Packet Filtering - port, source IP address, destination IP address, MAC address
- URL Content Filtering - string or domain name detection in URL string

Quality of Service Control

- Supports the DiffServ approach
- Traffic prioritization and bandwidth management based-on IP protocol, port number and address

Wireless LAN

- Compliant with IEEE 802.11n, 802.11g and 802.11b standards
- 2.4 GHz – 2.484 GHz frequency range
- Up to 300 Mbps wireless operation rate
- Wi-Fi Protected Setup (WPS) for easy setup
- 64/128 bits WEP supported for encryption
- Wireless security with WPA-PSK / WPA2-PSK support
- WDS repeater function support

IPTV Applications*4

- IGMP Snooping
- Virtual LAN (VLAN)
- Quality of Service (QoS)

VoIP

- Two RJ-11 FXS ports for connecting to regular telephones
- One RJ-11 FXO port for PSTN Fixed-line
- Compliant with SIP standard (RFC3261)
- Supports G.711 A / μ law, and G.729 Audio Codec standards
- Supports Telephony Features: call waiting, silence suppression, voice activity detection (VAD), comfort noise generation (CNG), G.168 line echo cancellation, caller ID (Bell 202, V23)
- Voice over data, QoS control to ensure higher voice quality
- Automatic fallback to PSTN Fixed-line when the Internet or VoIP service is not available
- Gateway – Least Cost Routing support (for retail package only)

ATM and PPP Protocols

- ATM Adaptation Layer Type 5 (AAL5)
- Multiple Protocol over AAL5 (RFC 2684, formerly RFC 1483)
- Bridged or routed Ethernet encapsulation
- VC and LLC based multiplexing
- PPP over Ethernet (PPPoE)
- PPP over ATM (RFC 2364)
- Classical IP over ATM (RFC 1577)
- MAC Encapsulated Routing (RFC 1483 MER)
- OAM F4 / F5

Virtual Private Network (VPN) (BiPAC 7404VNOX only)

- 16 IPsec VPN Tunnels
- 8 L2TP VPN Tunnels (Dial-in: 4, Dial-out: 4)
- 8 PPTP VPN Tunnels (Dial-in: 4, Dial-out: 4)
- Embedded IPsec, L2TP & PPTP client / server
- IKE key management
- DES, 3DES and AES encryption for IPsec
- Embedded powerful 3DES accelerator
- MPPE Encryption for PPTP
- L2TP over IPsec
- L2TP / PPTP / IPsec pass-through

Management

- Quick Installation Wizard and Auto-scan ADSL settings
- Web-based GUI for remote and local management
- Firmware upgrade and configuration data upload and download via web-based GUI
- Embedded Telnet server for remote and local management
- SNMP v3, MIB-I and MIB-II support
- Supports DHCP server / client / relay
- TR-069*4 supports remote management

Hardware Specifications

Physical Interface

- WLAN: 3 x 2dbi detachable antennas
- DSL: ADSL port
- Telephone: 1-port FXO (For PSTN Fixed-line support) 2-port FXS
- USB 2.0 supports 3G / HSDPA modem backup
- Ethernet: 4-port 10 / 100 / 1000M auto-crossover (MDI / MDI-X) Switch
- Console: PS2
- Factory default reset button
- WPS push button
- Power jack
- Power switch

Physical Specifications

- Dimensions: 9.04" x 6.10" x 1.46" (229.5mm x 155mm x 37mm)

Power Requirements

- Input: 15V DC, 1.6A

Operating Environment

- Operating temperature: 0 – 40°C
- Storage temperature: -20 – 70°C
- Humidity: 20 – 95% non-condensing

Models & Standards Supported

Product Models

- BiPAC 7404VNOX: 3G / VoIP / 802.11n ADSL2+ VPN Firewall Router
- BiPAC 7404VNPX: 3G / VoIP / 802.11n ADSL2+ Firewall Router

Standards

- BiPAC 7404VNOXA / VNPXA: Supports Annex A and Annex M (Annex A and Annex M: ADSL over POTS)
- BiPAC 7404VNOXU / VNPXU: Supports Annex B and U-R2 (Annex B and U-R2: ADSL over ISDN)

*Notes:

1. On request for Telco / ISP projects
2. The router may require firmware modification for certain ADSL2 / 2+ / Annex M DSLAMs.
3. The 3G / HSDPA data rate depends on your local service provider and your 3G / HSDPA modem.
4. IPTV application may require subscription to IPTV services from a Telco / ISP.
5. Specifications on this datasheet are subject to change without prior notice.